

BS 4504 Circular Flanges - General

British Standard BS 4504 : Section 3.1 : 1989 - Circular Flanges for Pipes, Valves and Fittings (PN Designated), Specification for Steel Flanges. This covers flanges in nominal pressure ranges PN 2.5 to PN 40 and nominal sizes up to DN 4000 (see table below). BS 4504 substantially agrees with ISO 7005-1 : 1992 (E) Part 1 : Steel Flanges.

BS 4504 : 1969 is still commonly used. This older standard allows for manufacture from bar, whereas the latest standard specifies that forging or plate are to be used, which can be significantly more expensive. There are minor differences in dimensions between the two versions. The following tables are based on the later version.

Summary of flanges covered by BS 4504 : Section 3.1

Code No.	Description	PN Range	DN Range
101	Plate flange for welding (see page 8-65)	PN 2.5	DN 10 to DN 2000
		PN 6, 10, 16, 25, 40	DN 10 to DN 600
102 ¹	Loose plate flange with weld-on plate collar or for lapped pipe end (Weld-on plate collar = Code 132 ¹ Lapped pipe end = Code 133 ¹)	PN 6, 10, 16, 25, 40	DN 10 to DN 600
104 ¹	Loose plate flange with weld-neck collar (Weld-neck collar = Code 134 ¹)	PN 6, 10, 16, 25, 40	DN 10 to DN 600
105	Blank flange (see page 8-70)	PN 2.5, 6	DN 10 to DN 2000
		PN 10, 16	DN 10 to DN 1200
		PN 25, 40	DN 10 to DN 600
111	Weld-neck flange (see page 8-66)	PN 2.5, 6, 10, 16	DN 10 to DN 2000 ²
		PN 25	DN 10 to DN 1000
		PN 40	DN 10 to DN 600
112	Hubbed slip-on flange for welding (see page 8-68)	PN 6	DN 10 to DN 300
		PN 10, 16, 25, 40	DN 10 to DN 600
113	Hubbed threaded flange (see page 8-69)	PN 6, 10, 16, 25, 40	DN 10 to DN 150
121 ¹	Integral flange	PN 6, 10, 16, 25	DN 10 to DN 2000
		PN 40	DN 10 to DN 600

Notes

- Flanges > DN 2000, are not covered in this summary.
- Dimensions: Nominal sizes, DN followed by a numerical designation of size (a convenient round number for reference purposes), are used as defined in ISO 6708.
- Pressure Ratings: Nominal pressures, i.e. PN followed by a numerical designation of size (a convenient round number for reference purposes), are used as defined in ISO 7268.


1 Dimensions for these flanges are not covered in this summary.

2 The DN range for weld neck flanges extends to DN 4000 for PN 2.5, to DN 3600 for PN 6, and to DN 3000 for PN 10.

Designations/Marking

Marking. All flanges are marked with BS number, code number, PN, DN, material designation, manufacturers name or trade mark, cast number or melt identification, thread identification, An example follows:

BS 4504/111/B - PN 16 - DN 400 - B4 - XXX - 12345

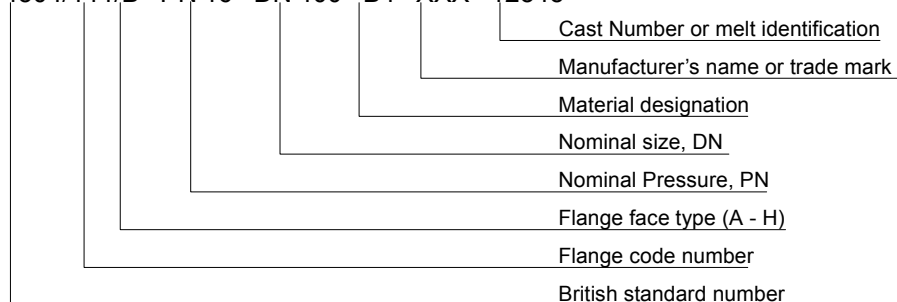


BS 4504 Circular Flanges - General

Dimensions and Tolerances

Dimension	Range	Tolerance	
		mm	
Flange Facings (see page 8-63)	Eccentricity of machined facing diameters	≤ DN 100 > DN 100	1.0 2.0
	a (type B facing height)	2 mm	+0, -1.0
		3 mm	+0, -2.0
		4 mm	+0, -3.0
		5 mm	+0, -4.0
		6 mm	+0, -5.0
	b (type C and E facing height)	All	+0.5, -0
	b (type G facing height)	All	+0, -0.5
	b (type H facing height, outer)	All	+0.2, -0
	c (type D and F facing height)	All	+0, -0.5
	d (type H facing height, inner)	All	+0.5, -0
B and E (facing diameters)	All	+0, -0.5	
C and D (facing diameters)	All	+0.5, -0	
Surface Finish	Facing types A, B, E and F	All, turning All, other than turning	Ra = 3.2 μm min 12.5 μm max Ra = 3.2 μm min 6.3 μm max
	Facing types C, D, G and H	All	Ra = 0.8 μm min 3.2 μm max
Flange Drilling Details (see page 8-64)	B (diameter of bolt circle)	Bolt sizes M10 to M24 Bolt sizes M27 to M45	±0.9 ±1.4
	Centre to centre of adjacent bolt holes	Bolt sizes M10 to M24 Bolt sizes M27 to M45	±0.45 ±0.7
All	A (outside diameter)	≤ DN 150	±2.0
		> DN 150 ≤ DN 500	±3.0
		> DN 500 ≤ DN 1200	±5.0
		> DN 1200 ≤ DN 1800	±7.0
		> DN 1800	±10.0
	C (flange thickness, machined on both faces)	≤ 18 mm thickness	±1.0
		> 18 mm < 50 mm thickness	±1.0
C (flange thickness, machined on front face)	≤ 18 mm thickness	+2.0, -1.0	
	> 18 mm < 50 mm thickness	+4.0, -1.5	
Weld Neck Flanges, Code 111 (see page 8-66)	B (outside diameter of hub at welding end)	≤ DN 125	+3.0, -0
		> DN 125 ≤ DN 1200	+4.5, -0
		> DN 1200	+6.0, -0
	F (hub diameter)	≤ DN 50	+0, -2.0
		> DN 50 ≤ DN 150	+0, -4.0
		> DN 150 ≤ DN 300	+0, -6.0
		> DN 300 ≤ DN 600	+0, -8.0
		> DN 600 ≤ DN 1200	+0, -10.0
	D (length through hub)	≤ DN 80	±1.5
		> DN 80 ≤ DN 250	±2.0
> DN 250		±3.0	
Slip on, Code 112 (see page 8-68) and Threaded, Code 113 (see page 8-69) Flanges	E (slip on flange hub diameter) B (threaded flange hub diameter)	≤ DN 50	+1.0, -0
		> DN 50 ≤ DN 150	+2.0, -0
		> DN 150 ≤ DN 300	+4.0, -0
		> DN 300 ≤ DN 600	+8.0, -0
		> DN 600 ≤ DN 1200	+12.0, -0
		> DN 1200 ≤ DN 1800	+16.0, -0
		> DN 1800	+20.0, -0
	B (slip on bore diameter)	≤ DN 100	+0.5, -0
		> DN 100 ≤ DN 400	+1.0, .0
		> DN 400 ≤ DN 600	+1.5, .0
D (length through hub)	> DN 600	+3.0, -0	
Blank Flanges, Code 105 (see page 8-70)	B (flange thickness)	Same as Weld Neck D	
	C (unmachined centre portion)	Same as C for all other flanges Maximum specified	

BS 4504 Circular Flanges - General

Weld Neck Flange - Welding Ends

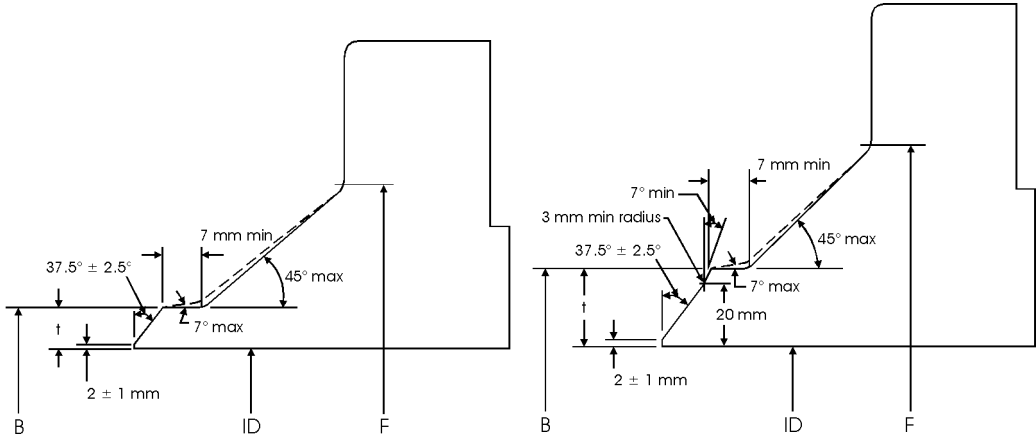


Welding end for Wall Thickness (t) from 5 mm to 22.2 mm


Welding end for Wall Thickness (t) > 22.2 mm

Flange Facings - BS 4504


BS 4504 flange facing types A to H are defined below. The dimensions vary with pipe size (DN) and pressure rating (PN) as detailed in the following table.




Type A
Flat face





Type B
Raised face




Type C
Tongue face




Type D
Groove face




Type E
Spigot




Type F
Recess



Type G
'O' Ring recess



Type H
'O' Ring groove



BS 4504 Circular Flanges - General

Flange facing dimensions (BS 4504)

DN	A mm						Face Dimensions									
	PN 2.5	PN 6	PN 10	PN 16	PN 25	PN 40	B mm	C mm	D mm	E mm	a mm	b mm	c mm	d mm	α mm	e mm
10	35	35	40	40	40	40	34	35	24	23	2	4	3	2	-	5
15	40	40	45	45	45	45	39	40	29	28	2	4	3	2	-	5
20	50	50	58	58	58	58	50	51	36	35	2	4	3	2	41°16'	5
25	60	60	68	68	68	68	57	58	43	42	2	4	3	2	41°16'	5
32	70	70	78	78	78	78	65	66	51	50	2	4	3	2	41°16'	5
40	80	80	88	88	88	88	75	76	61	60	3	4	3	2	41°16'	5
50	90	90	102	102	102	102	87	88	73	72	3	4	3	2	41°16'	5
65	110	110	122	122	122	122	109	110	95	94	3	4	3	2	41°16'	5
80	128	128	138	138	138	138	120	121	106	105	3	4	3	2	41°16'	5
100	148	148	158	158	162	162	149	150	129	128	3	4.5	3.5	2.5	32°15'	6
125	178	178	188	188	188	188	175	176	155	154	3	4.5	3.5	2.5	32°15'	6
150	202	202	212	212	218	218	203	204	183	182	3	4.5	3.5	2.5	32°15'	6
200	258	258	268	268	278	285	259	260	239	238	3	4.5	3.5	2.5	32°15'	6
250	312	312	320	320	335	345	312	313	292	291	3	4.5	3.5	2.5	32°15'	6
300	365	365	370	378	395	410	363	364	343	342	4	4.5	3.5	2.5	32°15'	6
350	415	415	430	438	450	465	421	422	395	394	4	5	4	3	27°24'	7
400	465	465	482	490	505	535	473	474	447	446	4	5	4	3	27°24'	7
450	520	520	532	550	555	560	523	524	497	496	4	5	4	3	27°24'	7
500	570	570	585	610	615	615	575	576	549	548	4	5	4	3	27°24'	7
600	670	670	685	725	720	735	675	676	649	648	5	5	4	3	27°24'	7
700	775	775	800	795	820	-	777	778	751	750	5	5	4	3	27°24'	7
800	880	880	905	900	930	-	882	883	856	855	5	5	4	3	27°24'	7
900	980	980	1005	1000	1030	-	987	988	961	960	5	5	4	3	27°24'	7
1000	1080	1080	1110	1115	1140	-	1092	1094	1062	1060	5	6	5	4	28°39'	8
1200	1280	1295	1330	1330	1350	-	1292	1294	1262	1260	5	6	5	4	28°39'	8
1400	1480	1510	1535	1530	1560	-	1492	1494	1462	1460	5	6	5	4	28°39'	8
1600	1690	1710	1760	1750	1780	-	1692	1694	1662	1660	5	6	5	4	28°39'	8
1800	1890	1920	1960	1950	1985	-	1982	1894	1862	1860	5	6	5	4	28°39'	8
2000	2090	2125	2170	2150	2210	-	2092	2094	2062	2060	5	6	5	4	28°39'	8



Manufacture

- **Materials.** Flange codes 111 112 and 113 are manufactured from a forging or steel casting. Stainless steel forgings conforming to ASTM A 182, have an additional requirement for grade F304L and F316L that carbon content (by ladle analysis) shall be 0.030% max. Forgings to BS 1503 and comparable ASTM standard grades specified in BS 4504 are as listed in the following table.

BS and ASTM forging grades in BS 4504

BS 1503 Grade	ASTM A 182 Grade
304S11	F304L
304S31	F304
304S51	F304H
347S31	F347
347S51	F347H
321S31	F321
321S51	F321H
316S11	F316L
316S31	F316
316S51	F316H
310S31	F310



Flange Drilling Details - BS 4504



DN	PN	A	B	C	Bolt Holes	
		mm	mm	mm	No.	Bolt size
10	2.5 & 6	75	50	11	4	M10
	10,16	90	60	14	4	M12
15	2.5 & 6	80	55	11	4	M10
	10 & 16	95	65	14	4	M12
20	2.5 & 40	95	65	14	4	M12
	2.5 & 6	90	65	11	4	M10
25	10 & 16	105	75	14	4	M12
	25 & 40	105	75	14	4	M12
32	2.5 & 6	100	75	11	4	M10
	10 & 16	115	85	14	4	M12
40	25 & 40	115	85	14	4	M12
	2.5 & 6	120	90	14	4	M12
50	10 & 16	140	100	18	4	M16
	25 & 40	140	100	18	4	M16
65	2.5 & 6	130	100	14	4	M12
	10 & 16	150	110	18	4	M16
80	25 & 40	150	110	18	4	M16
	2.5 & 6	140	110	14	4	M12
100	10 & 16	165	125	18	4	M16
	25 & 40	165	125	18	4	M16
125	2.5 & 6	160	130	14	4	M12
	10 & 16	185	145	18	4/8	M16
150	25 & 40	185	145	18	8	M16
	2.5 & 6	190	150	18	4	M16
200	10 & 16	200	160	18	8	M16
	25 & 40	200	160	18	8	M16
250	2.5 & 6	210	170	18	4	M16
	10 & 16	220	180	18	8	M16
300	25 & 40	235	190	22	8	M20
	2.5 & 6	240	200	18	8	M16
350	10 & 16	250	210	18	8	M16
	25 & 40	270	220	26	8	M24
400	2.5 & 6	265	225	18	8	M16
	10 & 16	285	240	22	8	M20
450	25 & 40	300	250	26	8	M24
	2.5 & 6	320	280	18	8	M16
500	10 & 16	340	295	22	8/12	M20
	25	360	310	26	12	M24
550	40	375	320	30	12	M27
	2.5 & 6	375	335	18	12	M16
600	10	395	350	22	12	M20
	16	405	355	26	12	M24
650	25	425	370	30	12	M27
	40	450	385	33	12	M30
700	2.5 & 6	440	395	22	12	M20
	10	445	400	22	12	M20
750	16	460	410	26	12	M24
	25	485	430	30	16	M27
800	40	515	450	33	16	M30

DN	PN	A	B	C	Bolt Holes	
		mm	mm	mm	No.	Bolt size
350	2.5 & 6	490	445	22	12	M20
	10	505	460	22	16	M20
	16	520	470	26	16	M24
	25	555	490	33	16	M30
400	40	580	510	36	16	M33
	2.5 & 6	540	495	22	16	M20
	10	565	515	26	16	M24
	16	580	525	30	16	M27
450	25	620	550	36	16	M33
	40	660	585	39	16	M36
	2.5 & 6	595	550	22	16	M20
	10	615	565	26	20	M24
500	16	640	585	30	20	M27
	25	670	600	36	20	M33
	40	685	610	39	20	M36
	2.5 & 6	645	610	22	20	M20
600	10	670	620	26	20	M24
	16	715	650	33	20	M30
	25	730	660	36	20	M33
	40	755	670	42	20	M39
700	2.5 & 6	755	705	26	20	M24
	10	780	725	30	20	M27
	16	840	770	36	20	M33
	25	845	770	39	20	M36
800	40	890	795	48	20	M45
	2.5 & 6	860	810	26	24	M24
	10	895	840	30	24	M27
	16	910	840	36	24	M33
900	25	960	875	42	24	M39
	2.5 & 6	975	920	30	24	M27
	10	1015	950	33	24	M30
	16	1025	950	39	24	M36
1000	25	1085	990	48	24	M45
	2.5 & 6	1075	1020	30	24	M27
	10	1115	1050	33	28	M30
	16	1125	1050	39	28	M36
1200	25	1185	1090	48	28	M45
	2.5 & 6	1175	1120	30	28	M27
	10	1230	1160	36	28	M33
	16	1255	1170	42	28	M39
1400	25	1320	1210	56	28	M52
	2.5	1375	1320	30	32	M27
	6	1405	1340	33	32	M30
	10	1455	1380	39	32	M36
1600	16	1485	1390	48	32	M45
	25	1530	1420	56	32	M52
	2.5	1575	1520	30	36	M27
	6	1630	1560	36	36	M33
1800	10	1675	1590	42	36	M39
	16	1685	1590	48	36	M45
	25	1755	1640	62	36	M56
	2.5	1790	1730	30	40	M27
2000	6	1830	1760	36	40	M33
	10	1915	1820	48	40	M45
	16	1930	1820	56	40	M52
	25	1975	1860	62	40	M56
2200	2.5	1990	1930	30	44	M27
	6	2045	1970	39	44	M36
	10	2115	2020	48	44	M45
	16	2130	2020	56	44	M52
2400	25	2185	2070	70	44	M64
	2.5	2190	2130	30	48	M27
	6	2265	2180	42	48	M39
	10	2325	2230	48	48	M45
2600	16	2345	2230	62	48	M56
	25	2425	2300	70	48	M64

Plate Flanges (Code 101) - BS 4504




DN	PN	A mm	B mm	C mm
10	2.5 & 6	75	12	18.0
	10 & 16	90	14	
	25 & 40	90	14	
15	2.5 & 6	80	12	22
	10 & 16	95	14	
	25 & 40	95	14	
20	2.5 & 6	90	14	27.5
	10 & 16	105	16	
	25 & 40	105	16	
25	2.5 & 6	100	14	34.5
	10 & 16	115	16	
	25 & 40	115	16	
32	2.5 & 6	120	16	43.5
	10 & 16	140	18	
	25 & 40	140	18	
40	2.5 & 6	130	16	49.5
	10 & 16	150	18	
	25 & 40	150	18	
50	2.5 & 6	140	16	61.5
	10 & 16	165	20	
	25 & 40	165	20	
65	2.5 & 6	160	16	77.5
	10 & 16	185	20	
	25 & 40	185	22	
80	2.5 & 6	190	18	90.5
	10 & 16	200	20	
	25 & 40	200	24	
100	2.5 & 6	210	18	116.0
	10 & 16	220	22	
	25 & 40	235	26	
125	2.5 & 6	240	20	141.5
	10 & 16	250	22	
	25 & 40	270	28	
150	2.5 & 6	265	20	170.5
	10 & 16	285	24	
	25 & 40	300	30	
200	2.5 & 6	320	22	221.5
	10 & 16	340	24	
	25	360	32	
	40	375	36	
250	2.5 & 6	375	24	276.5
	10	395	26	
	16	405	29	
	25	425	35	
40	450	42		

DN	PN	A mm	B mm	C mm
300	2.5 & 6	440	24	327.5
	10	445	26	
	16	460	32	
	25	485	38	
	40	515	48	
350	2.5 & 6	490	26	359.5
	10	505	28	
	16	520	35	359.0
	25	555	42	
40	580	54	359.5	
400	2.5 & 6	540	28	411.0
	10	565	32	
	16	580	38	
	25	620	46	
40	660	60		
450	2.5 & 6	595	30	462.0
	10	615	36	
	16	640	42	
	25	670	50	
40	685	66		
500	2.5 & 6	645	30	513.5
	10	670	38	
	16	715	46	
	25	730	56	
40	755	72		
600	2.5 & 6	755	32	616.5
	10	780	42	
	16	840	52	
	25	845	68	
40	890	84		
700	2.5	860	36	To be specified by purchaser
800	2.5	975	38	
900	2.5	1075	40	
1000	2.5	1175	42	
1200	2.5	1375	44	
1400	2.5	1575	48	
1600	2.5	1790	51	
1800	2.5	1990	54	
2000	2.5	2190	58	

Notes

- Dimension B is the flange thickness with or without a raised face.
- For drilling details see page 8-64.
- For tolerances see page 8-61.
- For facing types and dimensions see page 8-62.

Weld Neck Flanges (Code 111) - BS 4504



DN	PN	A	B	C	D	E	F	G	H	DN	PN	A	B	C	D	E	F	G	H
		mm	mm	mm	mm	mm	mm	mm	mm			mm	mm	mm	mm	mm	mm	mm	mm
10	2.5.6	75	17.2	12	28	6	26	3	1.8	100	2.5.6	210	114.3	16	45	12	130	6	3.6
	10	90		14	35		28		130		3.6								
	16	90		14	35		28		130		3.6								
	25	90		16	35		28		134		3.6								
	40	90		16	35		28		134		3.6								
15	2.5.6	80	21.3	12	30	6	30	3	2	125	2.5.6	240	139.7	18	48	12	155	6	4
	10	95		14	35		32		158		4								
	16	95		14	35		32		158		4								
	25	95		16	38		32		162		4								
	40	95		16	38		32		162		4								
20	2.5.6	90	26.9	14	32	6	38	4	2.3	150	2.5.6	265	168.3	18	48	12	184	8	4.5
	10	105		16	38		39		184		4.5								
	16	105		16	38		39		184		4.5								
	25	105		18	40		40		190		4.5								
	40	105		18	40		40		190		4.5								
25	2.5.6	100	33.7	14	35	6	42	4	2.6	200	2.5.6	320	219.1	20	55	16	236	8	5.6
	10	115		16	38		46		234		5.6								
	16	115		16	38		46		234		5.6								
	25	115		18	40		46		244		6.3								
	40	115		18	40		46		244		6.3								
32	2.5.6	120	42.4	14	35	6	55	5	2.6	250	2.5.6	375	273	22	60	18	290	10	6.3
	10	140		16	40		56		288		6.3								
	16	140		16	40		56		288		6.3								
	25	140		18	42		56		296		7.1								
	40	140		18	42		56		306		7.1								
40	2.5.6	130	48.3	14	38	7	62	5	2.6	300	2.5.6	440	323.9	22	62	18	342	10	7.1
	10	150		16	42		64		342		7.1								
	16	150		16	42		64		342		7.1								
	25	150		18	45		64		350		8								
	40	150		18	45		64		362		8								
50	2.5.6	140	60.3	14	38	8	74	5	2.9	350	2.5.6	490	355.6	22	62	20	385	10	7.1
	10	165		18	45		74		390		7.1								
	16	165		18	45		74		390		8								
	25	165		20	48		74		398		8								
	40	165		20	48		74		408		8.8								
65	2.5.6	160	76.1	14	38	9	88	6	2.9	400	2.5.6	540	406.4	22	65	20	438	10	7.1
	10	185		18	45		92		440		7.1								
	16	185		18	45		92		444		8								
	25	185		22	52		92		452		8.8								
	40	185		22	52		92		462		11								
80	2.5.6	190	88.9	16	42	10	102	6	3.2	450	2.5.6	595	457	24	65	20	492	12	7.1
	10	200		20	50		110		488		7.1								
	16	200		20	50		110		490		8								
	25	200		24	58		110		500		8.8								
	40	200		24	58		110		500		12.5								


Weld Neck Flanges (Code 111) - BS 4504

DN	PN	A	B	C	D	E	F	G	H	
		mm	mm	mm	mm	mm	mm	mm	mm	
500	2.5,6	645	508	24	68	15	538	12	7.1	
	10	670		28	75	16	540		7.1	
	16	715		34	90		546		8	
	25	730		44	125	20	558		10	
	40	755		52	140		562		14.2	
600	2.5,6	755	610	24	70	16	640	12	7.1	
	10	780		28	80	18	640		7.1	
	16	840		36	95		650		8.8	
	25	845		46	125	20	660		11	
	40	890		60	150		666		16	
700	2.5	860	711	24	70	16	740	12	1	
	6	860		24	70		740		7.1	
	10	895		30	80	18	746		8	
	16	910		36	100		750		8.8	
	25	960		46	125	20	760		12.5	
800	2.5	975	813	26	70	16	842	12	1	
	6	975		24	70		842		7.1	
	10	1015		32	90	18	848		8	
	16	1025		38	105	20	848		10	
	25	1085		50	135	22	864		14.2	
900	2.5	1075	914	26	70	16	942	12	1	
	6	1075		26	70		942		7.1	
	10	1115		34	95	20	948		10	
	16	1125		40	110		948		10	
	25	1185		54	145	24	968		16	
1000	2.5	1175	1016	26	70	16	1045	12	1	
	6	1175		26	70		1045		7.1	
	10	1230		34	95	20	1050		10	
	16	1255		42	120	22	1056		10	
	25	1320		58	155	24	1070		17.5	
1200	2.5	1375	1220	26	70	16	1245	16	1	
	6	1405		28	90	20	1248		8	
	10	1455		38	115	25	1256		11	
	16	1485		48	130	30	1260		12.5	
	25	1575		26	70	16	1445		16	1
1400	6	1630	1420	32	90	20	1452	12	8	
	10	1675		42	120	25	1460		12	
	16	1685		52	145	30	1465		14.2	
	25	1790		26	80	20	1645		16	1
1600	6	1830	1620	34	90	20	1655	16	9	
	10	1915		46	130	25	1666		12	14
	16	1930		58	160	35	1668		16	
	25	1990		26	80	20	1845		16	1
1800	6	2045	1820	36	100		1855	15	10	
	10	2115		50	140	30	1866		15	
	16	2130		62	170	35	1870		17.5	
	25	2190		26	80	22	2045		16	1
2000	6	2265	2020	38	110	25	2058	15	11	
	10	2325		54	150	30	2070		16	
	16	2345		66	190	40	2072		20	

Notes

- For drilling details see page 8-64.
 - For tolerances see page 8-61.
 - For facing types and dimensions see page 8-62.
- 1 To be specified by the purchaser.

Slip On Flanges (Code 112) - BS 4504





DN	PN	A	B	C	D	E	F
		mm	mm	mm	mm	mm	mm
10	6	75	18.0	12	20	25	3
	10 & 16	90		14	20	30	
	25 & 40	90		16	22	30	
15	6	80	22	12	20	30	3
	10 & 16	95		14	20	35	
	25 & 40	95		16	22	35	
20	6	90	27.5	14	24	40	4
	10 & 16	105		16	24	45	
	25 & 40	105		18	26	45	
25	6	100	34.5	14	24	50	4
	10 & 16	115		16	24	52	
	25 & 40	115		18	28	52	
32	6	120	43.5	14	26	60	5
	10 & 16	140		16	26	60	
	25 & 40	140		18	30	60	
40	6	130	49.5	14	26	70	5
	10 & 16	150		16	26	70	
	25 & 40	150		18	32	70	
50	6	140	61.5	14	28	80	5
	10 & 16	165		18	28	84	
	25 & 40	165		20	34	84	
65	6	160	77.5	14	32	100	6
	10 & 16	185		18	32	104	
	25 & 40	185		22	38	104	
80	6	190	90.5	16	34	110	6
	10 & 16	200		20	34	118	
	25 & 40	200		24	40	118	
100	6	210	116.0	16	40	130	6
	10 & 16	220		20	40	140	
	25 & 40	235		24	44	145	
125	6	240	141.5	18	44	160	6
	10 & 16	250		22	44	168	
	25 & 40	270		26	48	170	
150	6	265	170.5	18	44	185	8
	10 & 16	285		22	44	195	
	25 & 40	300		28	75	190	

DN	PN	A	B	C	D	E	F
		mm	mm	mm	mm	mm	mm
200	6	320	221.5	20	44	240	8
	10 & 16	340		24	44	246	
	25	360		30	52	256	
	40	375		34	52	260	
250	6	375	276.5	22	44	295	10
	10	395		26	46	298	
	25	425		32	60	310	
	40	450		38	60	312	
300	6	440	327.5	22	44	355	10
	10	445		26	46	350	
	16	460		28	46	350	
	25	485		34	67	364	
350	40	515	359.5	42	67	380	10
	10	505		26	53	400	
	16	520		30	57	400	
	25	555		38	72	418	
400	40	580	359.5	46	72	424	10
	10	565		26	57	456	
	16	580		32	63	456	
	25	620		40	78	472	
450	40	660	411.0	50	78	478	10
	10	615		28	63	502	
	16	640		34	68	502	
	25	670		42	84	520	
500	40	685	462.0	50	84	522	12
	10	670		28	67	559	
	16	715		34	73	559	
	25	730		44	90	580	
600	40	755	513.5	52	90	576	12
	10	780		28	75	658	
	16	840		36	83	658	
	25	845		46	100	684	
-	40	890	616.5	60	100	686	12
	-	-		-	-	-	
-	-	-	-	-	-	-	-

Notes

- The hubs of slip on (code 112) flanges are parallel or have a draft <7 degrees.
- For drilling details see page 8-64.
- For tolerances see page 8-61.
- For facing types and dimensions see page 8-62.

Threaded Flanges (Code 113) - BS 4504





DN	PN	A mm	B mm	C mm	D mm	E mm
10	6	75	25	12	20	3
	16	90	30	14	20	
	40	90	30	16	22	
15	6	80	30	12	20	3
	16	95	35	14	20	
	40	95	35	16	22	
20	6	90	40	14	24	4
	16	105	45	16	24	
	40	105	45	18	26	
25	6	100	50	14	24	4
	16	115	52	16	24	
	40	115	52	18	28	
32	6	120	60	14	26	5
	16	140	60	16	26	
	40	140	60	18	30	
40	6	130	70	14	26	5
	16	150	70	16	26	
	40	150	70	18	32	
50	6	140	80	14	28	5
	16	165	84	18	28	
	40	165	84	20	34	
65	6	160	100	14	32	6
	16	185	104	18	32	
	40	185	104	22	38	
80	6	190	110	16	34	6
	16	200	118	20	34	
	40	200	118	24	40	
100	6	210	130	16	40	6
	16	220	140	20	40	
	40	235	145	24	44	

DN	PN	A mm	B mm	C mm	D mm	E mm
125	6	240	160	18	44	6
	16	250	168	22	44	
	40	270	170	26	48	
150	6	265	185	18	44	8
	16	285	195	22	44	
	40	300	200	28	52	
200	6	320	240	20	44	8
	16	340	246	24	44	
	40	375	260	34	52	
250	6	375	295	22	44	10
	16	405	298	26	46	
	40	450	312	38	60	
300	6	440	355	22	44	10
	16	460	350	28	46	
	40	515	380	42	67	
350	16	520	400	30	57	10
	40	580	424	46	72	
	16	580	456	32	63	
400	40	660	478	50	78	10
	16	640	502	34	68	
	40	685	522	50	84	
450	16	715	559	34	73	12
	40	755	576	52	90	
	16	840	658	36	83	
500	40	890	686	60	100	12
	16	910	760	36	83	
	16	1025	864	38	90	
600	16	1125	968	40	94	12
	16	1255	1072	42	100	
	-	-	-	-	-	

Notes

- Threaded flange (code 113) threads are tapered or parallel. BS 21 or ANSI/ASME B1.20.1 threads may be specified (see Section 10).
- The hubs of threaded (code 113) flanges are parallel or have a draft <7 degrees.
- For drilling details see page 8-64.
- For tolerances see page 8-61.
- For facing types and dimensions see page 8-62.

Blank Flanges (Code 105) - BS 4504



DN	PN	A mm	B mm	C mm
10	2.5 & 6	75	12	-
	10 & 16	90	14	-
	25 & 40	90	16	-
15	2.5 & 6	80	12	-
	10 & 16	95	14	-
	25 & 40	95	16	-
20	2.5 & 6	90	14	-
	10 & 16	105	16	-
	25 & 40	105	18	-
25	2.5 & 6	100	14	-
	10 & 16	115	16	-
	25 & 40	115	18	-
32	2.5 & 6	120	14	-
	10 & 16	140	16	-
	25 & 40	140	18	-
40	2.5 & 6	130	14	-
	10 & 16	150	16	-
	25 & 40	150	18	-
50	2.5 & 6	140	14	-
	10 & 16	165	18	-
	25 & 40	165	20	-
65	2.5 & 6	160	14	55
	10 & 16	185	18	55
	25 & 40	185	22	55
80	2.5 & 6	190	16	70
	10 & 16	200	20	70
	25 & 40	200	24	70
100	2.5 & 6	210	16	90
	10 & 16	220	20	90
	25 & 40	235	24	90
125	2.5 & 6	240	18	115
	10 & 16	250	22	115
	25 & 40	270	26	115
150	2.5 & 6	265	18	140
	10 & 16	285	22	140
	25 & 40	300	28	140
200	2.5 & 6	320	20	190
	10 & 16	340	24	190
	25	360	30	190
250	40	375	34	190
	2.5 & 6	375	22	235
	10	395	26	235
	16	405	26	235
	25	425	32	235
40	450	38	235	

DN	PN	A mm	B mm	C mm
300	2.5 & 6	440	22	285
	10	445	26	285
	16	460	28	285
	25	485	34	285
	40	515	42	285
350	2.5 & 6	490	22	325
	10	505	26	325
	16	520	30	325
	25	555	38	325
	40	580	46	325
400	2.5 & 6	540	22	375
	10	565	26	375
	16	580	32	375
	25	620	40	375
	40	660	50	375
450	2.5 & 6	595	24	425
	10	615	28	425
	16	640	34	425
	25	670	42	425
	40	685	54	425
500	2.5 & 6	645	24	475
	10	670	28	475
	16	715	36	475
	25	730	45	475
	40	755	56	475
600	2.5 & 6	755	34	575
	10	780	34	575
	16	840	44	575
	25	845	54	575
	40	890	70	575
700	2.5	860	36	-
	6	860	38	-
	10	895	38	670
	16	910	48	670
800	2.5	975	38	-
	6	975	42	-
	10	1015	42	770
	16	1025	52	770
900	2.5	1075	40	-
	6	1075	46	-
	10	1115	46	860
	16	1125	58	860
1000	2.5	1175	42	-
	6	1175	52	-
	10	1230	52	960
	16	1255	64	960
1200	2.5	1375	44	-
	6	1405	60	-
	10	1455	60	1160
	16	1485	76	1160
1400	2.5	1575	48	-
	6	1630	68	-
1600	2.5	1790	51	-
	6	1830	76	-
1800	2.5	1990	54	-
	6	2045	84	-
2000	2.5	2190	58	-
	6	2265	92	-

Notes

- Dimension B is the range thickness with or without a raised face.
- Dimension C is the maximum diameter of the centre portion of a blank flange face which need not be machined.
- For drilling details see page 8-64.
- For tolerances see page 8-61.
- For facing types and dimensions see page 8-62.